省级专精特新
Provincial “SRDI”



小 巨 人 企 业
“Little Giant” Firm




XINGLONG PUMP


杭州兴龙泵业有限公司
HANGZHOU XINGLONG PUMP CO.,LTD.
地址(Add)：中国 杭州市 瓶窑工业区凤城路1号
No.1 Fengcheng Road Pingyao Yuhang Area Hangzhou City China
电话(Tel)：(86)571-88548058/88543779
传真(Fax)：(86)571-88548016
邮编(Post Code)：311115
E-mail：kedi@xinglongpump.com

兴龙泵业
XINGLONG PUMP

计量单螺杆泵

Single Screw Pump For Metering

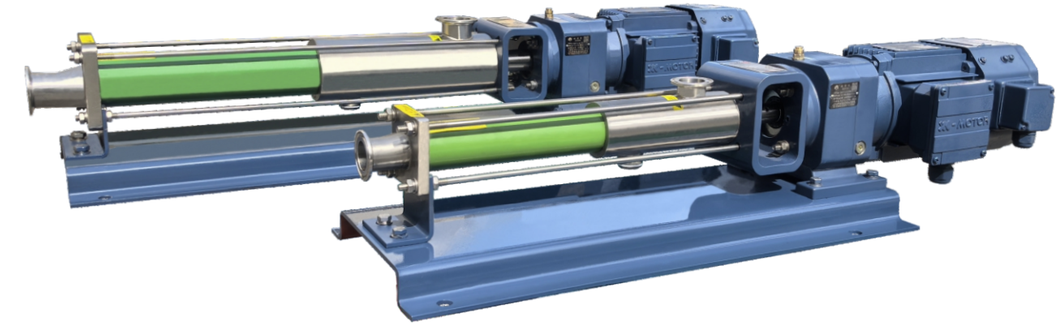

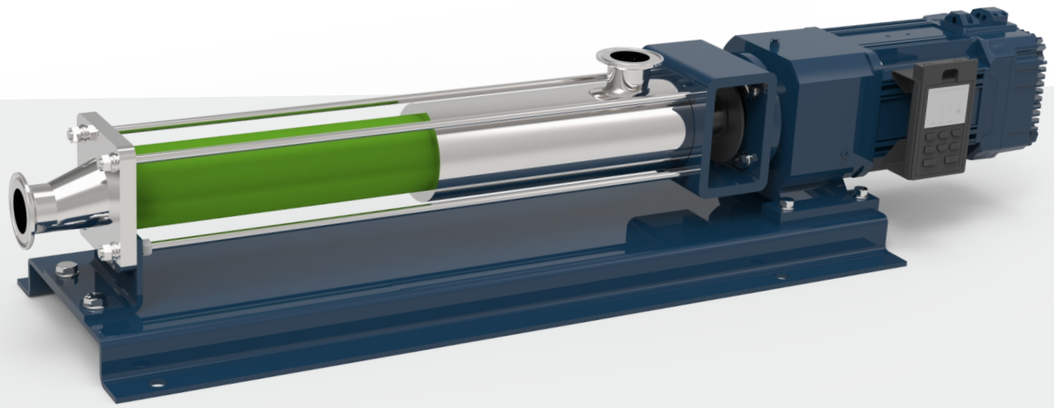

杭州兴龙泵业有限公司 出品

计量单螺杆泵


Single Screw Pump For Metering

兴龙泵业
XINGLONG PUMP

▶ 兴龙单螺杆泵，广泛应用于环保、石油、化工领域，其生产的计量单螺杆泵具有效率高、脉动小和计量精度高等优点。
Xinglong single screw pump is widely used in the fields of environmental protection, petroleum, and chemical engineering. Single screw pump for metering has the advantages of high efficiency, low pulsation, and high metering accuracy.

▶ 输送复杂介质　Delivery Complex Medium

- 含固体颗粒、纤维及高粘度（达$10^5mm^2/s$）的介质；
  Mediums which contain solid particles, fibers, and high viscosity (up to $10^5mm^2/s$);
- 对剪切敏感的介质（如乳液、活细胞培养液，破坏性小，保护药剂分子完整性）。
  Mediums sensitive to shearing (such as lotion and living cell culture medium, which are less destructive and protect the integrity of pharmaceutical molecules).

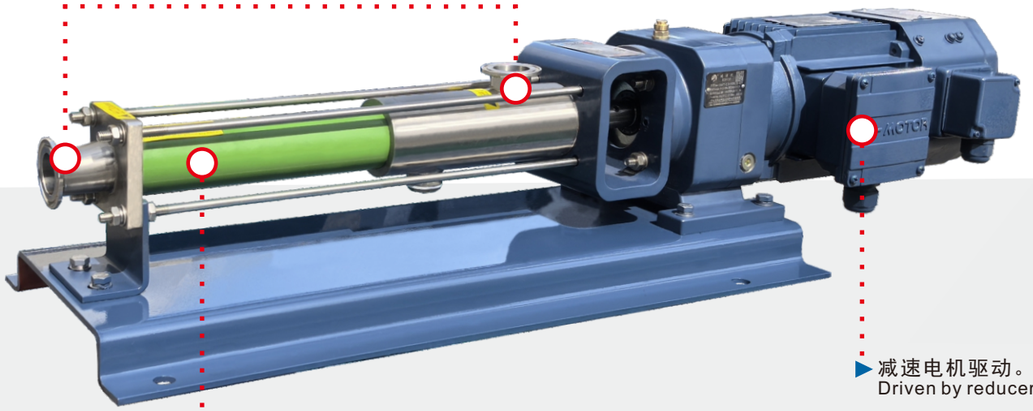

▶ 配永磁伺服一体减速机，控制精度高，过载能力强。
Equipped with a permanent magnet servo integrated reducer, with high control accuracy and strong overload capacity.


▶ 就地/远程控制，智能化驱动。
Local/remote control, intelligent driving.

▶ 可远程控制
Can be remotely controlled.



▶ 可就地控制
Can be remotely locally.



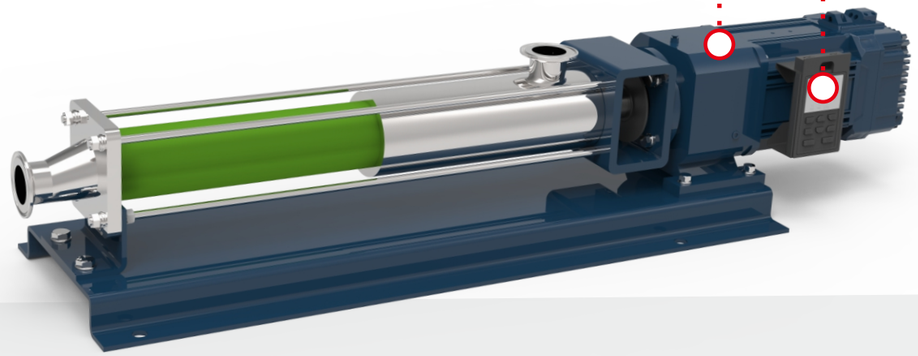

▶ 性能参数　Performance Parameter

型号 Type	转速Speed (r/min)	流量Flow (m^3/h)	压力 Pressure	减速机Reducer	驱动功率
XG021B06LJ	70~350	0.1~1	最大max: 6Bar	GX07T	0.75kW
	90~480	0.2~1.5			0.75kW
XG031B06LJ	80~321	0.2~2.5			0.75kW
	90~438	0.3~3.5			1.1kW

*此表仅供选型参考，具体配置可根据实际工况校核。
This table is for selection reference only, and the specific configuration can be verified according to actual working conditions.

*计量精度±1%。
Measurement accuracy ± 1%.